



TYPICAL SECTION

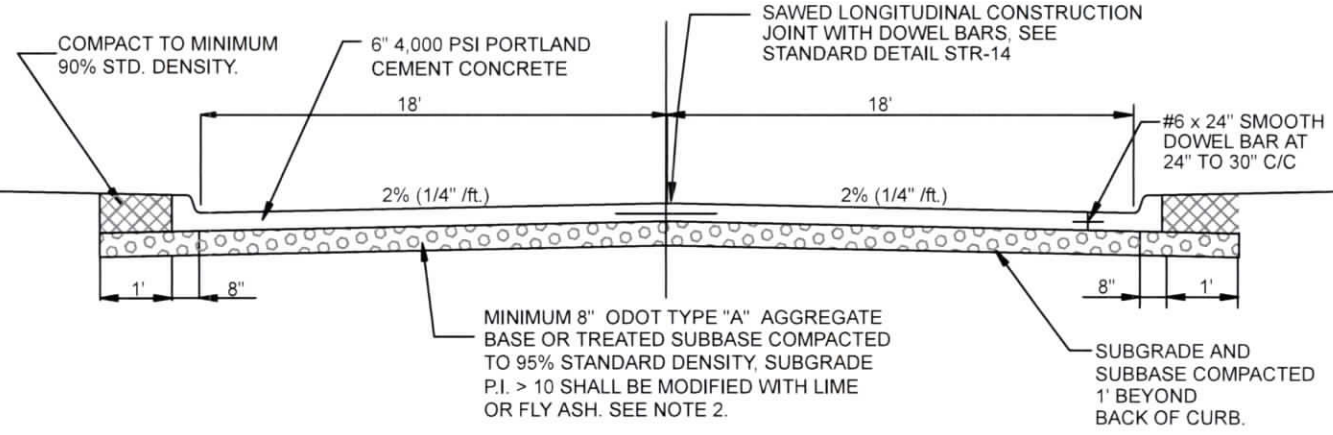

CONCRETE STREET SECTION

HALF SECTION
INTEGRAL CURB & PAVEMENT

HALF SECTION
SEPARATE PLACEMENTS

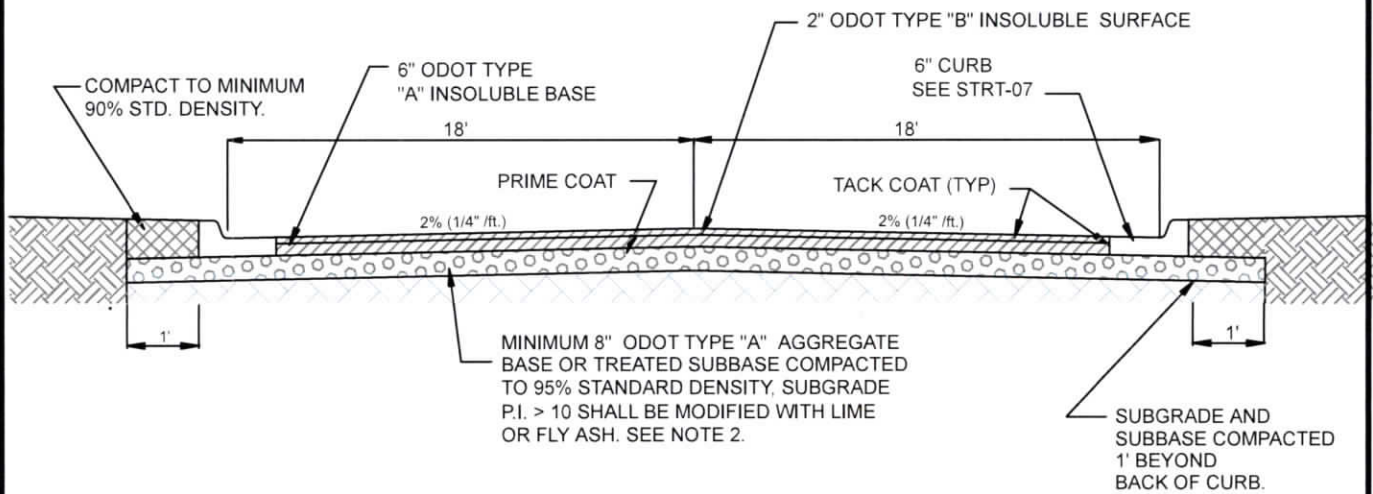

ASPHALTIC CONCRETE STREET SECTION

NOTES:

1. SECTIONS SHOWN ARE MINIMUM REQUIRED. SUBGRADE MAY REQUIRE ADDITIONAL THICKNESS OF MODIFICATION OR A SUBBASE DRAINAGE SYSTEM WHERE SEVERE SOIL CONDITIONS EXIST.
2. FOR EXISTING SUBBASE MATERIAL WITH PI < 10 SUBGRADE SHALL BE CLASSIFIED SELECT, INERT MATERIAL OR STABILIZED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY.
3. ASPHALT SURFACES SHALL CONFORM TO ODOT STANDARD 401.04 FOR TOLERANCES AND STANDARD DETAIL STRT-08 FOR TEXTURE.
4. IF A COMPACTED AGGREGATE SUBBASE IS USED, THE AGGREGATE SHALL BE PLACED ON SEPARATOR FABRIC.

REVISION	BY	DATE	RESIDENTIAL COLLECTOR STREET STANDARD DETAILS	
			CITY OF COLLINSVILLE, OKLAHOMA	
			ENGINEERING DIVISION	
			DATE 02/2020	STANDARD NO. STRT-02

STANDARD DETAIL STRT-02