



**TYPICAL SECTION**

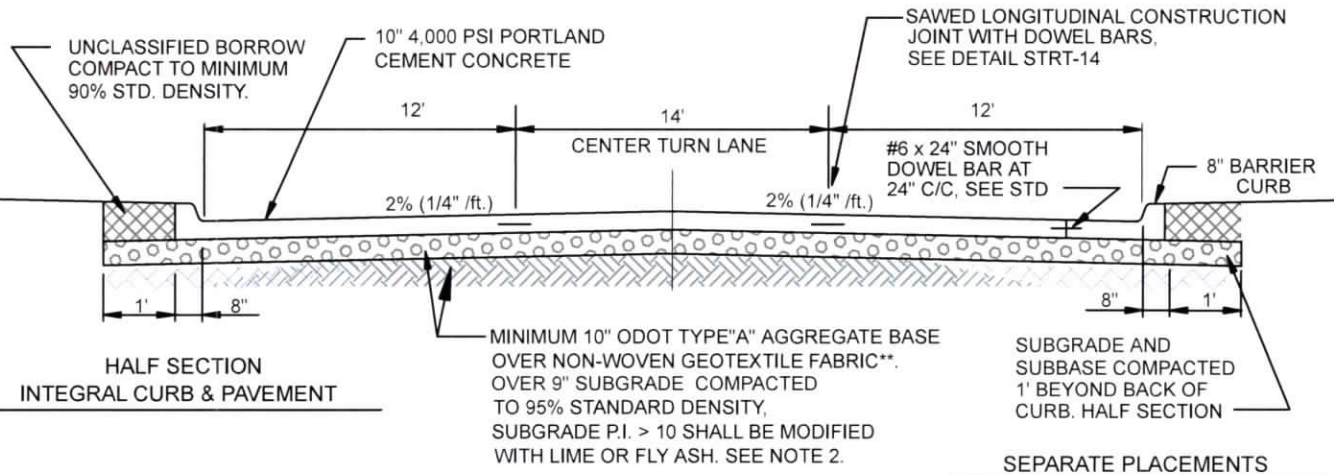

**CONCRETE STREET SECTION**

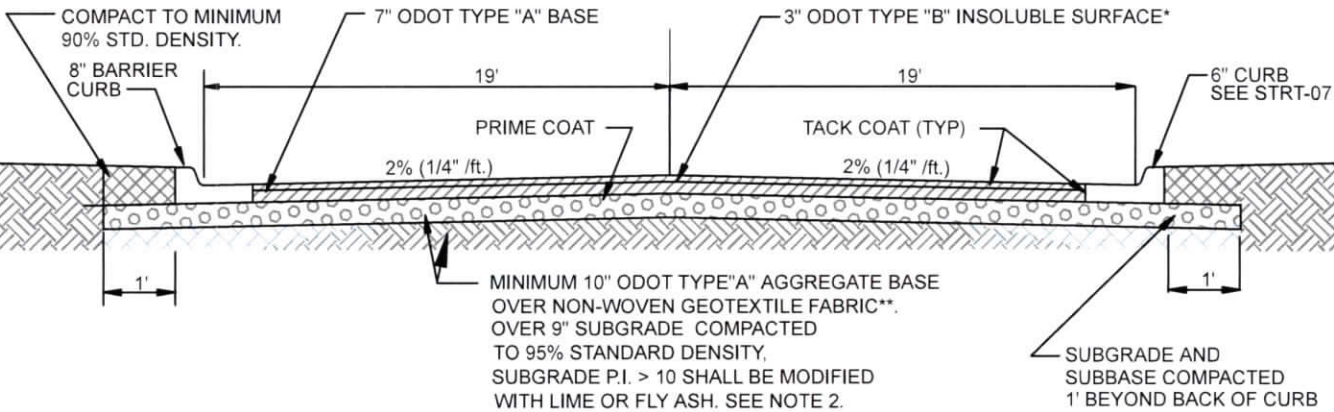

**ASPHALTIC CONCRETE STREET SECTION**

**NOTES:**

1. SECTIONS SHOWN ARE MINIMUM REQUIRED. SUBGRADE MAY REQUIRE ADDITIONAL THICKNESS OF MODIFICATION OR A SUBBASE DRAINAGE SYSTEM WHERE SEVERE SOIL CONDITIONS EXIST.
2. FOR EXISTING SUBGRADE MATERIAL WITH PI < 10 SUBGRADE SHALL BE CLASSIFIED SELECT, INERT MATERIAL OR STABILIZED AND COMPACTED TO 95% STANDARD PROCTOR DENSITY.
3. ASPHALT SURFACES SHALL CONFORM TO ODOT STANDARD 401.04 FOR TOLERANCES AND STANDARD DETAIL STRT-08 FOR TEXTURE.
4. IF A COMPACTED AGGREGATE SUBBASE IS USED, THE AGGREGATE SHALL BE PLACED ON SEPARATOR FABRIC.
- \*\*5. GEOTEXTILE FABRIC SHALL BE CONTECH C-80NW OR EQUIVALENT.
- \*6. OKLAHOMA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.

REVISION	BY	DATE	<b>COMMERCIAL/ INDUSTRIAL COLLECTOR STREET STANDARD DETAILS</b>	
			CITY OF COLLINSVILLE, OKLAHOMA	
			ENGINEERING DIVISION	
			DATE: 02/2020	STANDARD NO. STRT-03A

I:\STANDARD DETAILS\STREETS\STRT-03A.DWG